SYMJORA CONTRACTING

SERVICE PROFILE 2026



SERVICE 01

Groundworks & PCC

Formation, pits and PCC blinding: a clean, level base for the structure, prepared by our own crews.

Villa contracting in Dubai

01

SYMJORA CONTRACTING L.L.C

info@symj-ora.com

+971 50 529 5083

GROUNDWORKS & PCC

A clean, level base
for everything above it.

We prepare formations, build pits and place plain cement concrete (PCC) blinding, so the waterproofing and foundations start on a clean, compacted and level base. Levels are set out from the drawings and checked before every pour.



Finishing a pit
Pit edges trued up before the waterproofing.

WHAT WE COVER

- Formation levelling and compaction
- PCC blinding under rafts and footings
- Lift pits, sump pits and trenches
- Protection concrete over membranes
- Concrete by pump or crane
- Setting out and level checks

HOW WE WORK

01 Set out
Grid lines and levels marked from the drawings.

02 Prepare
Formation trimmed, compacted and checked for level.

03 Pour
PCC placed by pump and levelled to the pegs.

04 Check
Finished levels checked before the next trade starts.




Protection concrete
Concrete placed over the finished membrane.




Pouring by pump
PCC placed into the excavation by boom pump.



Materials by crane
Materials lifted onto the finished PCC.

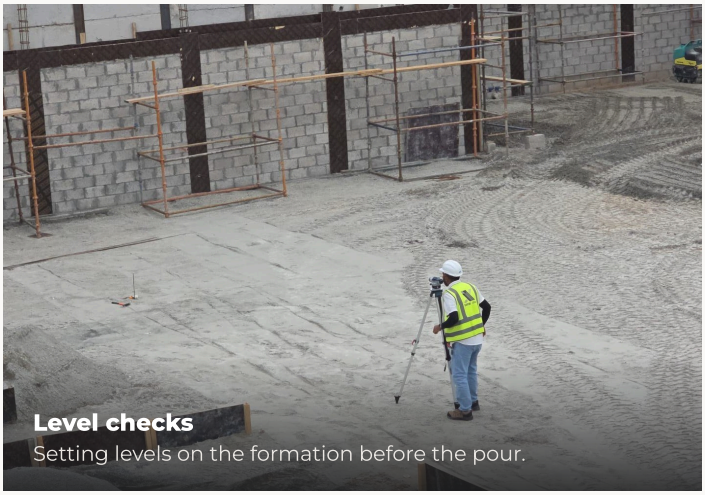

Level checks
Setting levels on the formation before the pour.

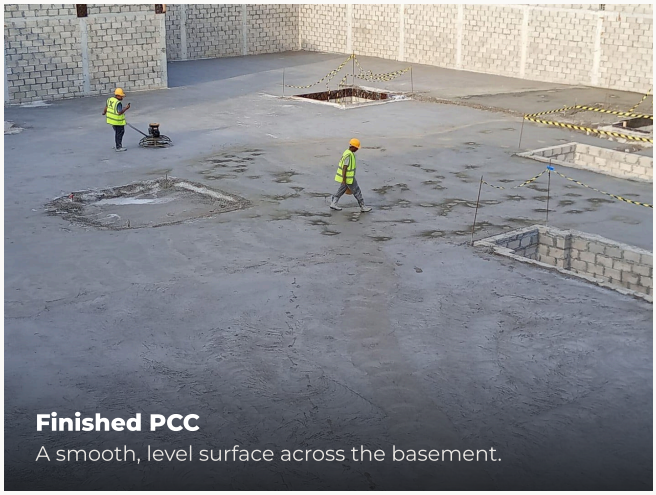


Finished PCC
A smooth, level surface across the basement.



GROUNDWORKS & PCC

Level from the start.

A clean, flat base makes every trade after it faster and better.

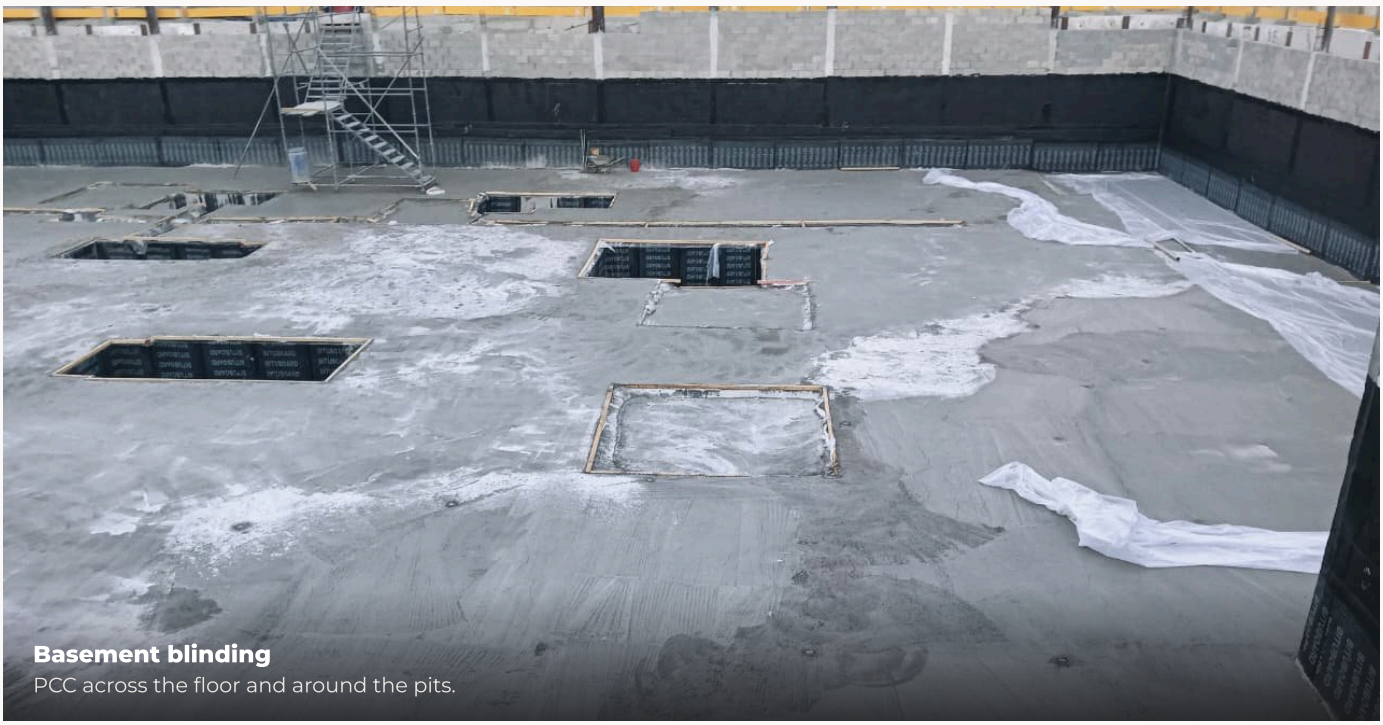

Basement blinding
PCC across the floor and around the pits.



Finished pit
Pit walls rendered and the floor levelled.




Pit floor
Smooth blinding inside a finished pit.



Clean corners
Fillets formed at the foot of the pit walls.



Fresh pour
Pit floor levelled and left to cure.

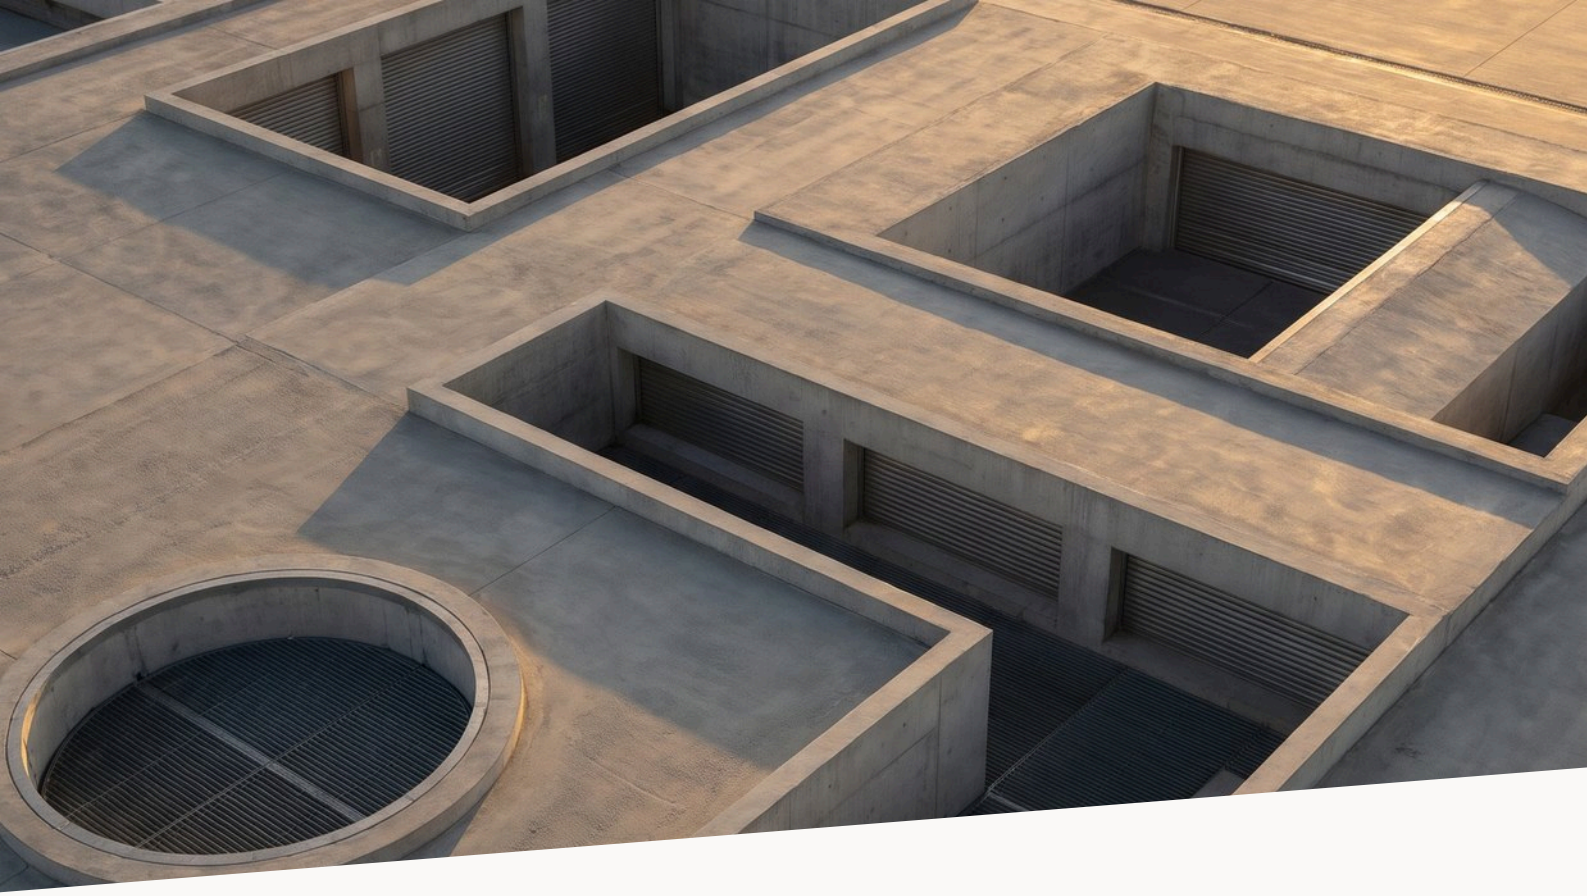

IN DETAIL

Floated flat, cured right

Surfaces are floated flat and kept damp while they cure, so the waterproofing goes onto a sound base.




Pits set out
Pits formed and marked across the slab.




Ready for waterproofing
Level PCC from wall to wall.




Pits formed
Pits and blinding across the excavation.

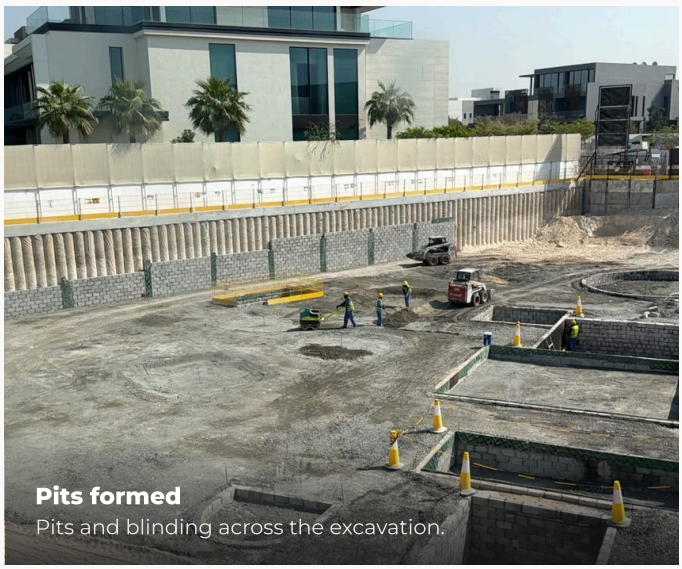

Pits formed
Pits and blinding across the excavation.

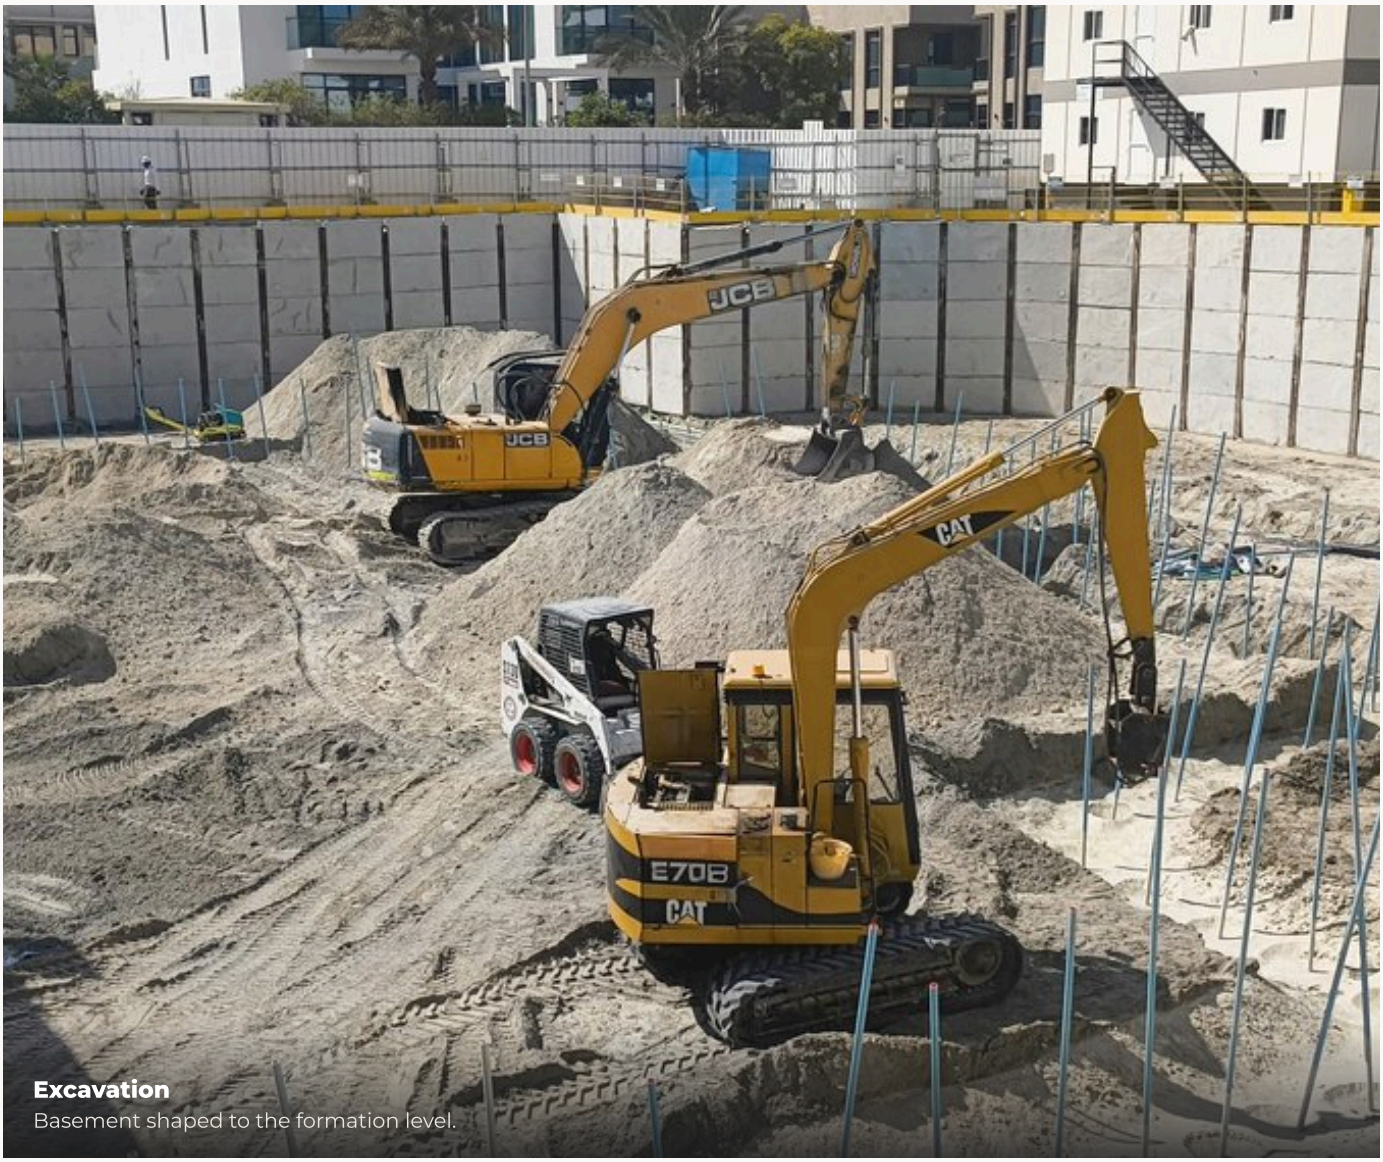


Excavation
Basement shaped to the formation level.

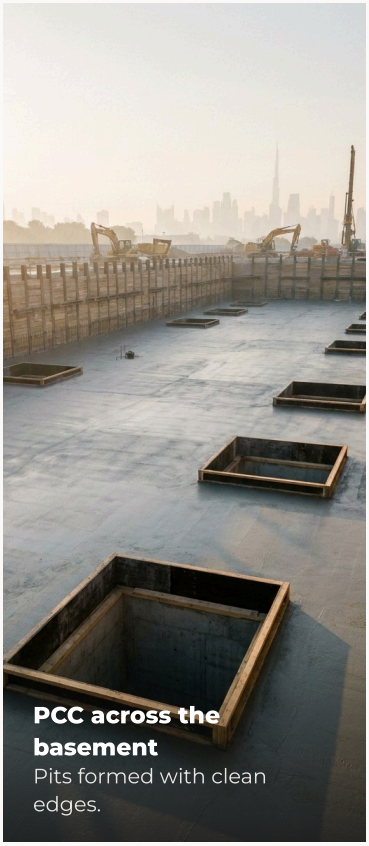


PCC across the basement
Pits formed with clean edges.



Pits formed
Pits and blinding across the excavation.

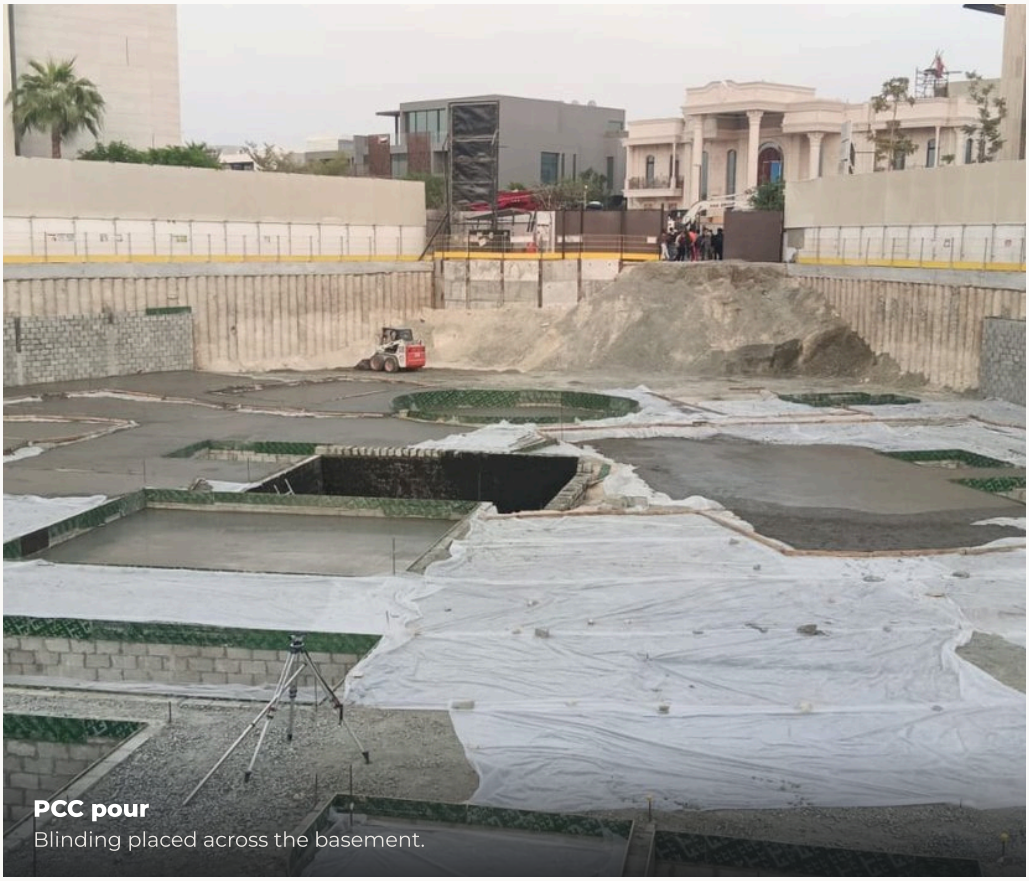

PCC pour
Blinding placed across the basement.

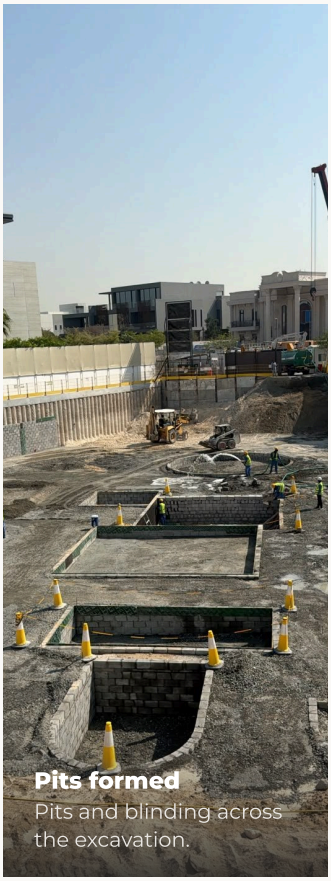

Pits formed
Pits and blinding across the excavation.




Road base
Compacted base, ready for the blinding.



PCC pour
Blinding placed across the basement.



PCC pour
Blinding placed across the basement.

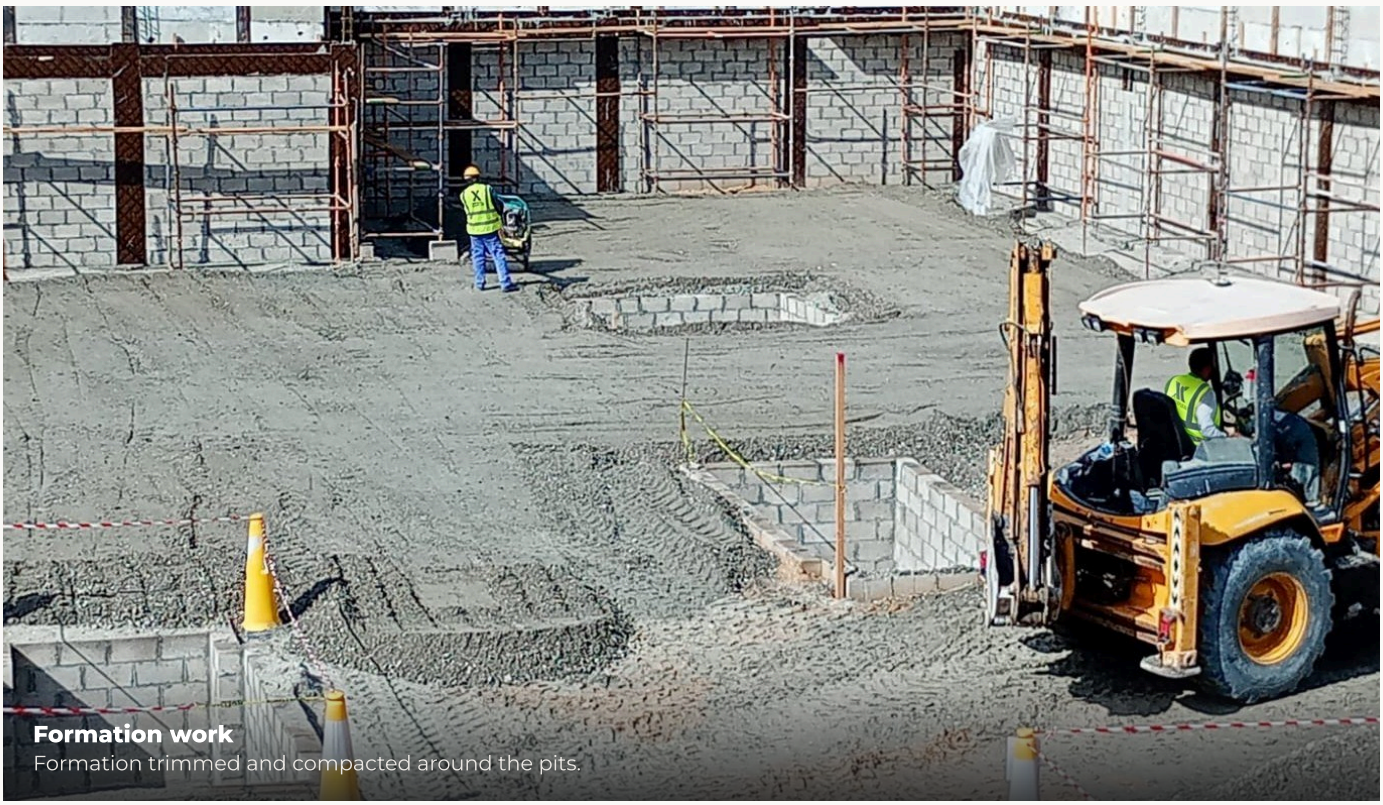

Formation work
Formation trimmed and compacted around the pits.



PCC complete
Basement floor and pits ready for waterproofing.



Ready for the next trade
Clean, level blinding across the basement.

WHAT WE CHECK BEFORE THE NEXT TRADE

- ✓ Formation compacted and level
- ✓ PCC to the specified thickness
- ✓ Levels checked against the drawings
- ✓ Pits square and to depth
- ✓ Smooth surface, ready for membrane
- ✓ Clean edges and corners



GROUNDWORKS & PCC

Good structures start at the bottom.

PCC is the first concrete on site. When it is level and clean, every trade after it works faster and better.

Our own crews supervised on site every day.

To the drawings and checked before the next trade.

Safe, tidy sites harnesses, PPE and clear work areas.

SYMJORA CONTRACTING L.L.C info@symj-ora.com +971 50 529 5083



GET IN TOUCH

Need a quote?
Contact us on WhatsApp.

Send us photos, drawings or a short description of the work. We will tell you honestly whether it is a good fit, and how we would approach it.

PHONE
+971 50 529 5083

WHATSAPP
+971 50 529 5083

EMAIL
info@symj-ora.com

WEBSITE
symj-ora.com/contracting

LOCATION
Dubai, UAE

SYMJORA CONTRACTING