SYMJORA CONTRACTING

SERVICE PROFILE 2026



SERVICE 02

Waterproofing

Membrane waterproofing for basements, foundations, pits, roofs and wet areas, sealed and protected before it is covered.

02

Villa contracting in Dubai

SYMJORA CONTRACTING L.L.C

info@symj-ora.com

+971 50 529 5083

WATERPROOFING

Basements kept dry from the very start.

We install membrane waterproofing for basements, foundations, retaining walls, pits, roofs and wet areas. Surfaces are prepared and primed, membranes are torch-applied with sealed laps, and every corner and pit is detailed and protected before the next trade covers it.

FROM OUR VILLA PROJECTS IN DUBAI



Vertical membrane
Torch-applying membrane to the basement walls.

WHAT WE COVER

- Horizontal membrane under rafts
- Vertical membrane on basement walls
- Lift pits, sump pits and corners
- Protection boards and screed
- Roofs and wet areas
- Leak repairs on existing villas

HOW WE WORK

01 Prepare
Surfaces cleaned, made good and primed.


02 Apply
Membrane torched on with overlapping, sealed laps.

03 Detail
Corners, pits and sleeves sealed with extra layers.


04 Protect
Protection board or screed before backfill or concrete.




Pit protection
Lining a waterproofed pit with protection board.

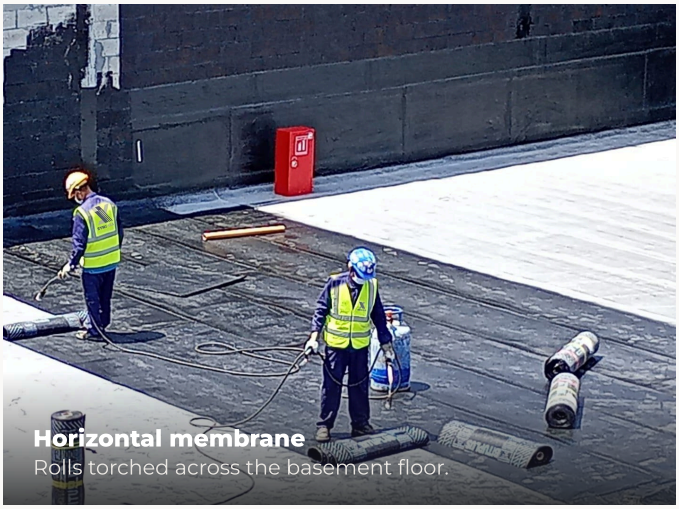


Horizontal membrane
Rolls torched across the basement floor.

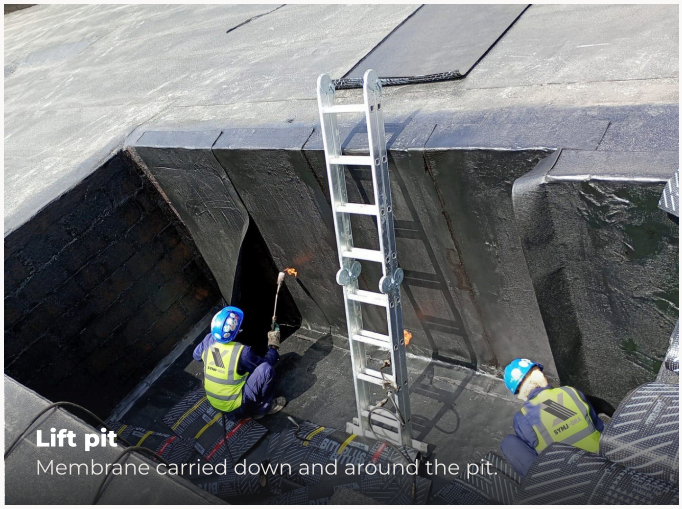

Lift pit
Membrane carried down and around the pit.

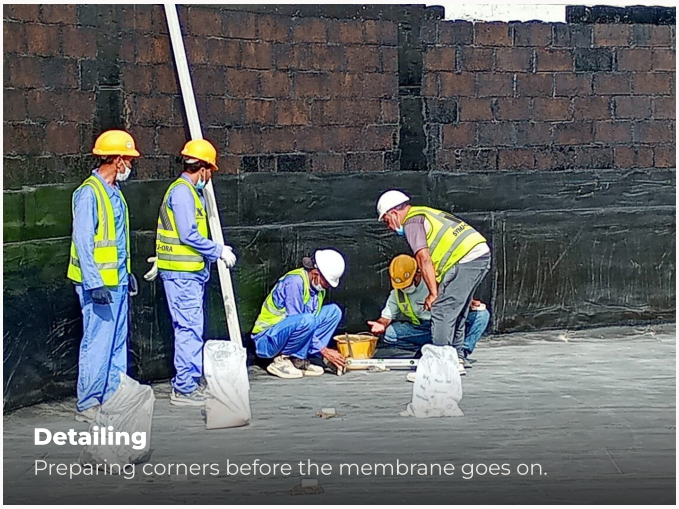

Detailing
Preparing corners before the membrane goes on.

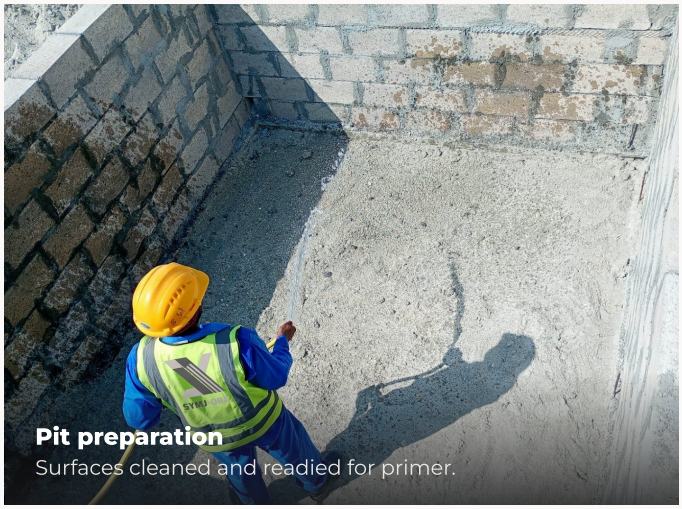

Pit preparation
Surfaces cleaned and readied for primer.



WATERPROOFING

Sealed at every lap.


Each seam is torched, pressed and checked before it is covered.



Retaining wall
Membrane applied to the full wall height.




Basement walls
Membrane carried up the walls.

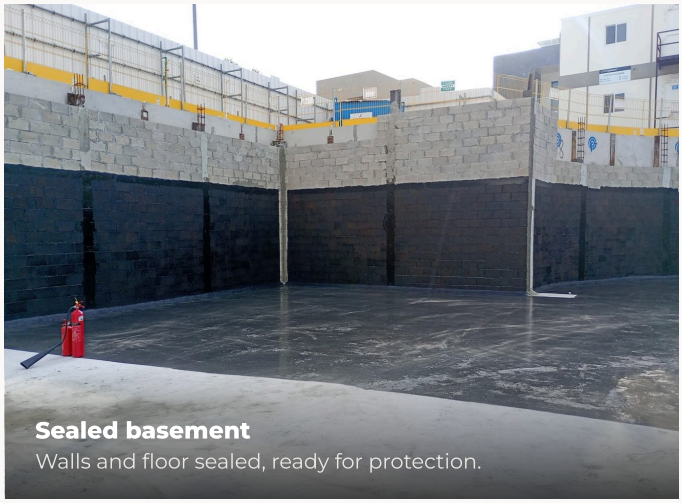

Sealed basement
Walls and floor sealed, ready for protection.



Lined pit
Membrane sealed into every corner.

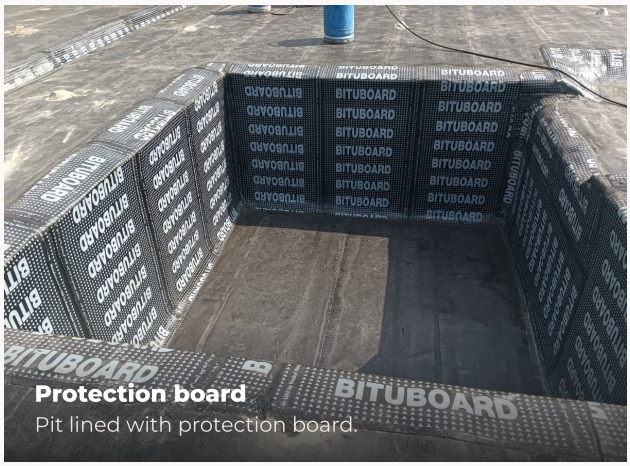


Protection board
Pit lined with protection board.




IN DETAIL

Dry materials, clean surfaces

Membranes are stored dry and out of the sun, and applied only to clean, primed surfaces.

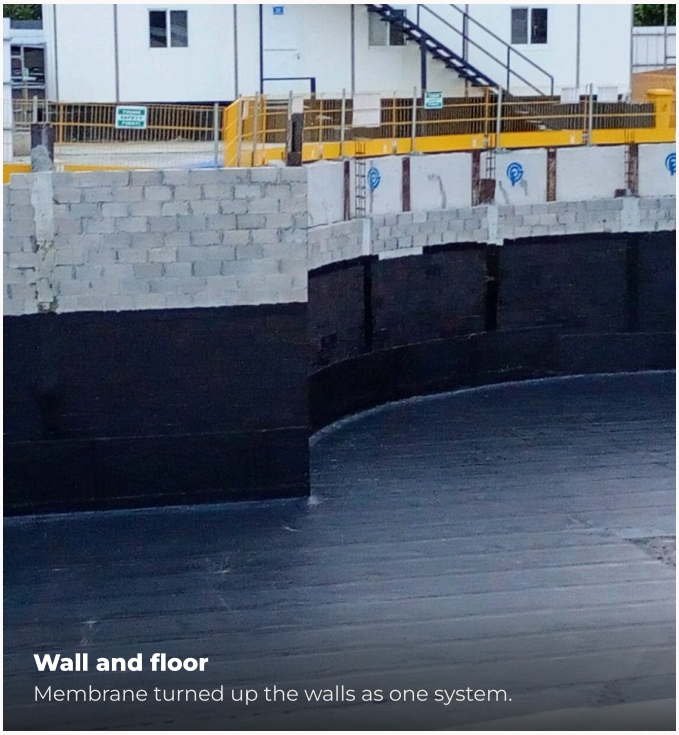


Wall and floor
Membrane turned up the walls as one system.

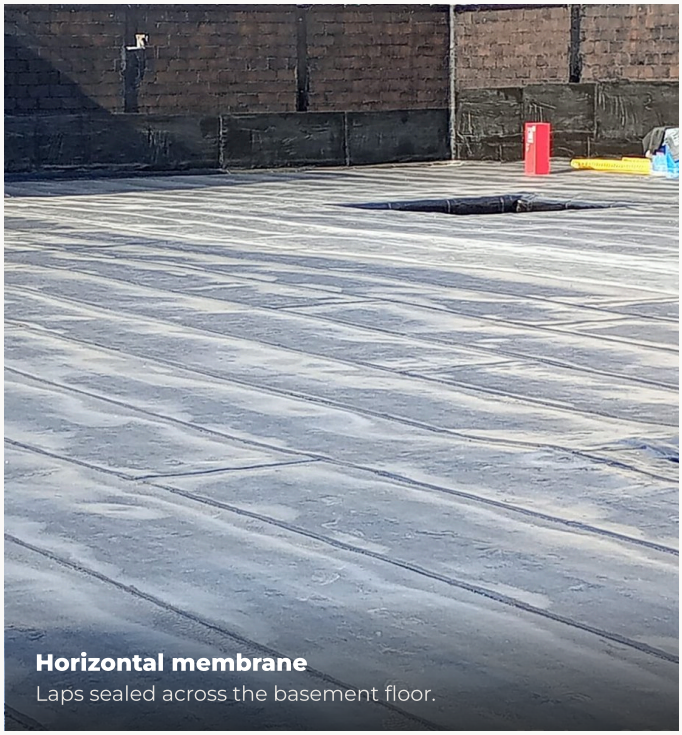

Horizontal membrane
Laps sealed across the basement floor.



Horizontal membrane
Laps sealed across the basement floor.

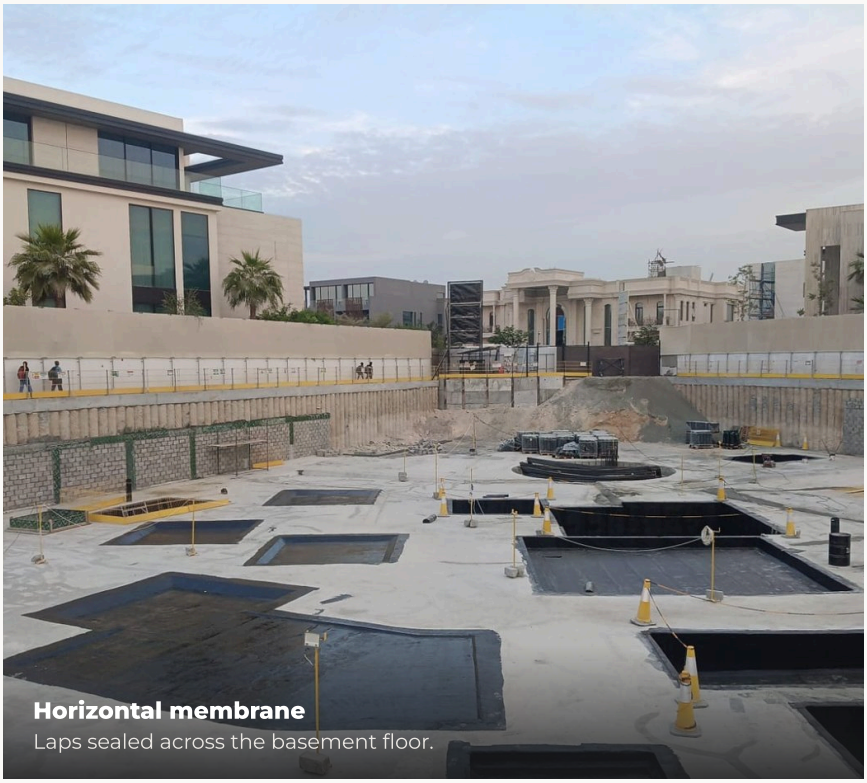

Horizontal membrane
Laps sealed across the basement floor.



Pit corners
Corners reinforced with extra layers.



Sealed laps
Every seam torched and pressed.



Deep pit
Walls and floor sealed as one.




Lift pit
Membrane sealed into every corner.



Horizontal membrane
Laps sealed across the basement floor.




Horizontal membrane
Laps sealed across the basement floor.

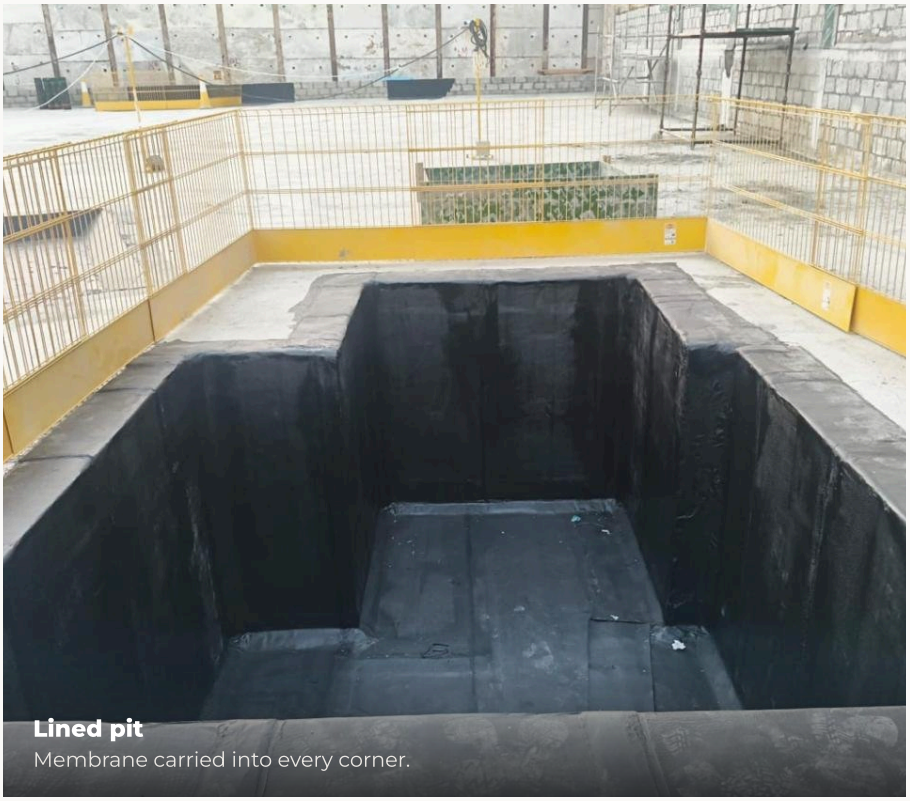


Lined pit
Membrane carried into every corner.




Pit lining
Laps torched and sealed.

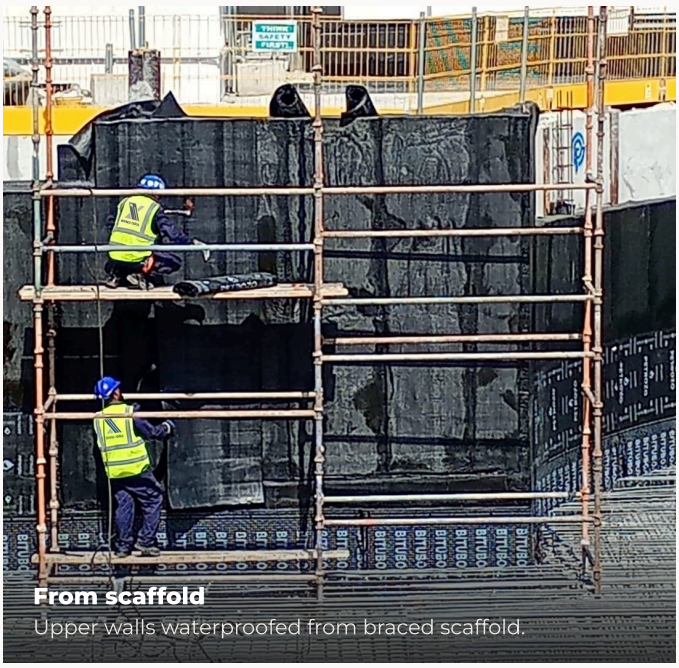

From scaffold
Upper walls waterproofed from braced scaffold.

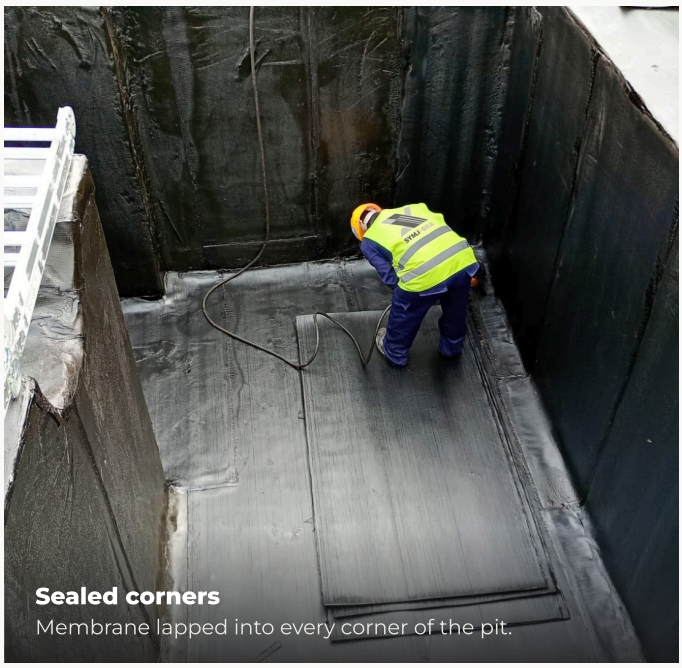

Sealed corners
Membrane lapped into every corner of the pit.

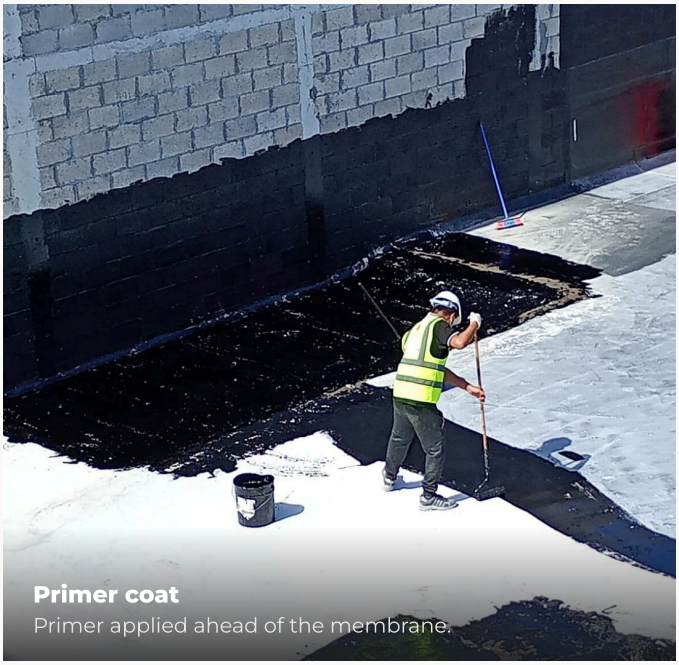


Primer coat
Primer applied ahead of the membrane.



Protected pit
Pit walls boarded before the concrete.

WHAT WE CHECK BEFORE IT IS COVERED

- ✓ Dry, clean and primed surfaces
- ✓ Every lap sealed along its length
- ✓ Corners and pits fully detailed
- ✓ Sleeves and penetrations sealed
- ✓ No bubbles, tears or loose edges
- ✓ Protection in place before backfill

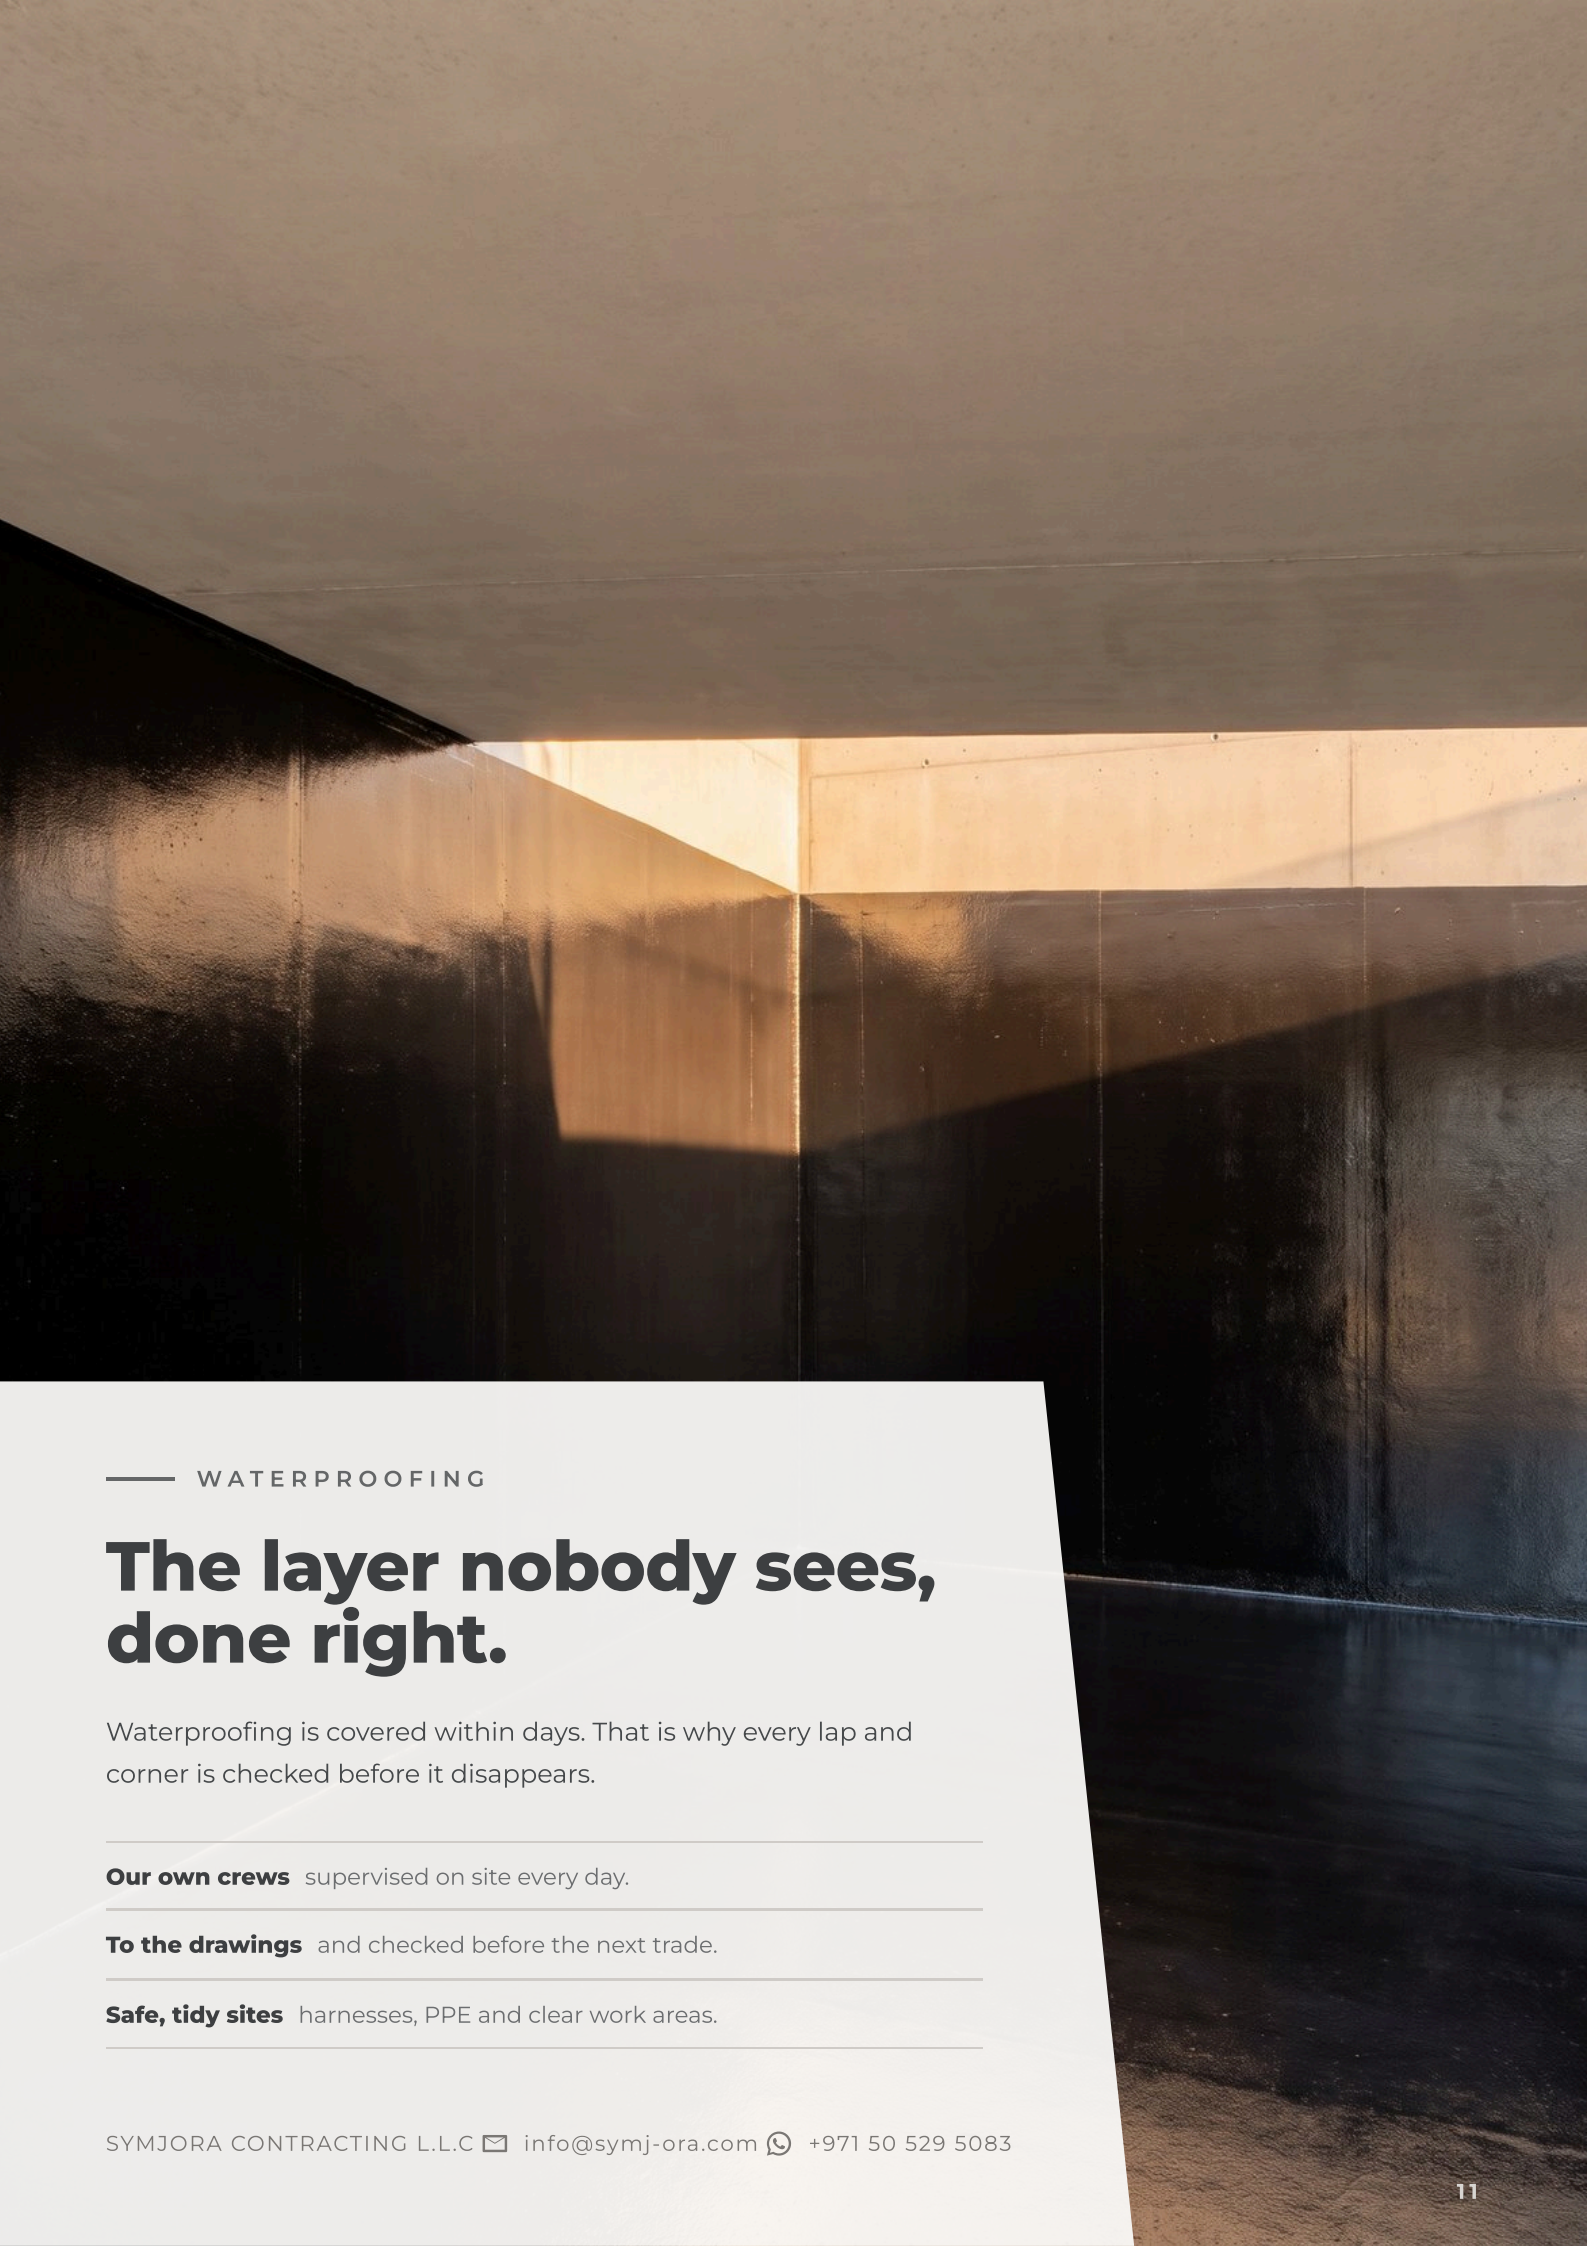

WATERPROOFING

The layer nobody sees, done right.

Waterproofing is covered within days. That is why every lap and corner is checked before it disappears.

Our own crews supervised on site every day.

To the drawings and checked before the next trade.

Safe, tidy sites harnesses, PPE and clear work areas.

SYMJORA CONTRACTING L.L.C info@symj-ora.com +971 50 529 5083



GET IN TOUCH

Need a quote?
Contact us on WhatsApp.

Send us photos, drawings or a short description of the work. We will tell you honestly whether it is a good fit, and how we would approach it.

PHONE
+971 50 529 5083

WHATSAPP
+971 50 529 5083

EMAIL
info@symj-ora.com

WEBSITE
symj-ora.com/contracting

LOCATION
Dubai, UAE

SYMJORA CONTRACTING